POLAR WINDOW

A lifecycle planner for CLPS lunar deliveries, from launch to return,
with the uncertainty and source of every number

Submission report for the 2026 challenge *CLPS Lunar Mission Browser*. Engine checks were measured on commit `f421298` of branch `featured`;
response times, test counts and screens on `f1d5667`, whose engines are unchanged.

Abstract

NASA's Commercial Lunar Payload Services (CLPS) programme buys the delivery of science payloads to the Moon from commercial providers. Planning one delivery draws on separate tools for launch design, weather, trajectory, radiation, communications and recovery, each with its own conventions. This report describes POLAR WINDOW, an open planner that follows one CLPS delivery through six sections: readiness, launch, trip, landing, contact with Earth and return. Every number it serves states its source, its margin or the reason it has none, and the age of any live input. No section returns a verdict or a combined score. The engines are checked against the public record of flown missions. The references are NASA's reconstructed trajectories of four CLPS landers, their published liftoff times and NOAA's list of solar particle events. Measured lunar radiation doses and the landing point of the OSIRIS-REx capsule complete the set. Designed at the direction each vehicle climbed, the launch instants of the three flown Falcon 9 missions fall within one minute of the published liftoffs. One day of propagation from a reconstructed state stays within one kilometre in all but one case. Unmet planned tolerances are reported with their measured values. When the climb direction is not known in advance, a designed launch instant misses by about 16 to 18 minutes. The wind ensemble shows no skill against one year of station observations, so its shares are marked not checked. Relays, link budgets and the return from the Moon remain unbuilt, because their inputs are not published.

1 Introduction

NASA's Commercial Lunar Payload Services (CLPS) programme buys the delivery of science payloads to the Moon from commercial providers [1]. Four CLPS landers have flown: Peregrine Mission One, IM-1, Blue Ghost Mission 1 and IM-2. Their reconstructed trajectories are public in NASA's SPICE archive [2]. The 2026 NASA Space Apps challenge *CLPS Lunar Mission Browser* asks for a tool to compare landing sites and dates [3]. The tool is meant for planners, educators and the public, and it should show the Sun and Earth against the local horizon.

The first version of POLAR WINDOW answered one question. At a south-polar site and over chosen dates, it reported how long the Sun and Earth stay above the site's own skyline. A delivery raises many more questions. A project manager must know when the vehicle can leave the pad and whether the weather rules allow it. The trip passes through sunlight, shadow and the radiation belts. After landing, the team needs the hours in which a ground station can hear the lander. The launch vehicle's booster comes back to a landing zone on land or at sea. Each payload must also be built, tested and delivered on time. Each answer comes from a different tool and data source, and each tool states its assumptions in its own way.

This report describes the extension of POLAR WINDOW into a planner that follows one CLPS delivery through six sections: *Ready*, *Launch*, *Trip*, *Landing*, *Contact* and *Return*. The work makes four contributions.

1. A single contract for every number. Each value states its provenance: computed, published, entered by a named person, or assumed. It carries a margin (a ±, a range or a multiplicative

factor) or the reason it has none, and the age of any live input. No section returns a verdict, a readiness percentage or a combined score.
2. Trajectory, launch, radiation and entry engines checked against flown missions. The references are NASA's reconstructions of the four CLPS trips and the measured landing of the OSIRIS-REx sample capsule.
3. A process design that separates network access, heavy computation and request handling. Every stored answer records the inputs and engine versions it came from. Section 5.9 measures its response times and its job queue under load.
4. A disclosure of every planned acceptance tolerance that the engines do not meet, with the measured value beside it.

The evaluation is bounded by public data. Only four CLPS trips have reconstructions, and none of the planned missions publishes a trajectory, a radio link budget or a return state. The engines are therefore checked on the flown cases, and the planned missions receive designed answers labelled as such. Two external references named in the plan could not be run: the General Mission Analysis Tool (GMAT) and the SPENVIS web service. Section 5 states what replaced each of them.

2 Related work

Illumination and Earth visibility at the lunar poles. Polar lighting has been mapped from Lunar Orbiter Laser Altimeter (LOLA) topography [4] by casting horizons and averaging Sun visibility over years [5]. Later work located persistently illuminated regions in camera images [6] and in higher-resolution terrain models [7]. These studies produce fractions over long periods on a fixed grid. They answer where the light is on average, not what happens at one landing point over one mission's dates. They also report no timing uncertainty per crossing. The surface engine of POLAR WINDOW computes the Sun and Earth from the Navigation and Ancillary Information Facility's SPICE system [8, 9] with the DE440 ephemeris [10]. It reports each duration with a margin derived from the terrain's vertical error.

Trajectory and launch design. High-fidelity mission design is available in open tools such as GMAT, which has a documented verification programme [11]. Its building blocks are standard. They include Lambert solvers for the initial transfer [12], numerical integration under point-mass and harmonic gravity [13], and lunar gravity fields from GRAIL [14]. These tools require a scripted mission and an analyst. They do not read NASA's CLPS reconstructions or relate a launch day to the lighting rule at the landing site. They also do not label an input as published or assumed. POLAR WINDOW does not compete with them on fidelity. It connects a small, checked subset of their methods to the landing site, the pad and the reconstructions.

Launch weather and forecast verification. Launch weather criteria are published per vehicle as rule sets. The Falcon 9 rules, for example, limit the wind at 162 ft and lightning near the pad [15]. Ensemble systems such as the Global Ensemble Forecast System (GEFS) give a sample of possible weather [16]. Lightning is observed from orbit by the Geostationary Lightning Mapper (GLM) [17, 18], and long wind records come from the MERRA-2 reanalysis [19]. The standard score for a probability forecast is the Brier score [20]. Public presentations of launch weather usually give one chance of a rule being broken. They rarely state the sample behind it or whether that chance has been checked against observations.

Radiation screening. Trapped belt fluxes are commonly taken from the AE8 and AP8 models [21, 22], implemented in the IRBEM library[1] and exposed in Python by SpacePy [23]. Galactic cosmic rays (GCR) can be modelled with one solar modulation parameter [24]. Measured doses

[1] `https://prbem.github.io/IRBEM/`

exist in lunar orbit from CRaTER [25] and on the far-side surface from Chang'e-4 [26]. Large solar particle events are described by published spectra [27]. Engineering tools such as OLTARIS compute dose behind shielding once a trajectory and a geometry are known [28]. They need an account and a finished design, so they do not serve early screening of several candidate trips.

Contact planning. The Deep Space Network (DSN) publishes each antenna's horizon mask and link parameters [29]. Delay-tolerant networks route messages over scheduled contacts with contact graph routing [30]. Neither source combines a station's mask with the terrain around a polar lander, which decides whether Earth is visible at all.

Gap. Each area has mature tools, but each answers one phase with its own conventions. None carries the provenance and uncertainty of a number from the pad to the landing site and back. POLAR WINDOW keeps both attached to every number across the six phases of a delivery. Its engines are deliberately simpler than the specialist tools above. Designed values are labelled as designed, and the radiation answers name the tools in which a design must be confirmed.

3 System design

3.1 Processes and data flow

The system is one Python code base run as three long-lived processes over PostgreSQL and Redis (fig. 1). The *API* process answers requests from the browser and from the agents. It reads stored answers and feed snapshots, and it never waits for a long computation. The *compute worker* runs trajectory, launch-calendar and contact jobs. The *feeds worker* is the only process that reaches external services. It fetches weather, space weather, launch schedules and DSN activity, and it stores each response as a snapshot with its fetch time. An import contract enforces this rule in code. No module in the API, the services, the agents or the numerical core can import the feed package.

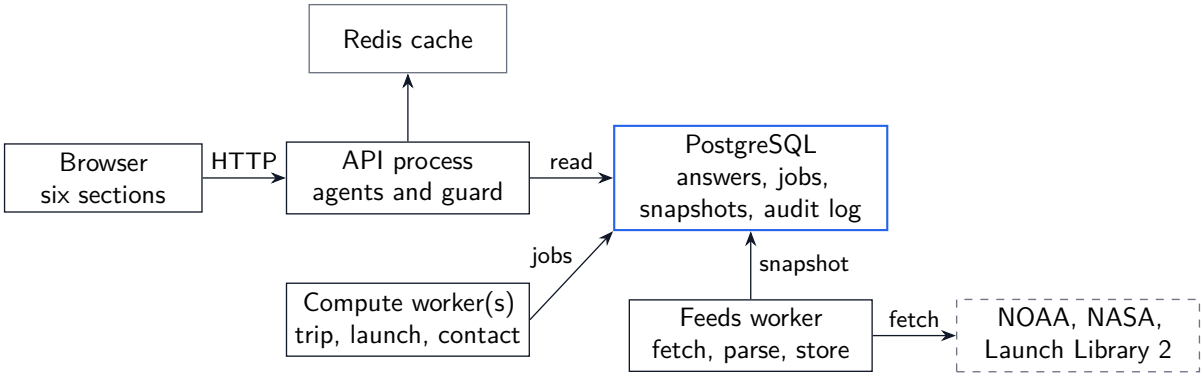


Figure 1: Processes. Only the feeds worker has outbound network access; the API queues work and reads stored answers.

A heavy answer is a *job*. Its key is a hash of the job kind, its parameters and the versions of every engine it depends on, called its *closure*. When a stored answer with that key exists, the API returns it at once. Otherwise the API queues a job and returns HTTP status 202 with a job reference, and the page polls until the answer is ready. Workers lease jobs from a PostgreSQL table with row locks that skip rows already taken, so several workers can run without a separate queue service. Each answer is stored as an *assessment* together with its inputs. These are the feed snapshot identifiers, the catalogue versions, the kernel set, the terrain product and any values a person entered. An answer is therefore reused until one of its inputs or engine versions changes.

3.2 One contract for every number

Every value that leaves the service has one shape, called a *quantity*. It holds the value, the unit, the provenance and exactly one form of margin: a symmetric ±, a low-to-high range, or a multiplicative factor. A value without a margin carries a sentence that says why. A value that cannot be given is null and carries its *missing reason*, for example that a vehicle's limit is not published. A duration cut short by the chosen dates is flagged as a lower bound. Probabilities use a second shape, called a *share*. It holds k of n model runs, an exact binomial interval [31] and a flag stating whether the share has been checked against observations.

Four rules of the project govern these shapes. No section returns a verdict: there is no go or no-go, no readiness percentage, no risk score and no overall chance of launch. Every number states whether it was computed, published, entered or assumed. Every live number shows its age, and past its staleness budget it is replaced by the reason there is no number. Every probability states its sample and its verification status. A schema test and the agents' guard check the first rule (section 4.9).

3.3 Layering, versions and catalogues

The numerical core has no input or output, no clock and no database access. Ten import contracts keep the layers apart. Among them, SPICE is reachable from one module only, routes reach the domain only through services, and agents reach it only through their tool module. Each engine carries its own version, for example `traj-3` for the trajectory engine and `lw-5` for launch design. A change to one engine invalidates only the answers whose closure contains it.

Static facts live in nine cited catalogues: launch pads, vehicles, ground stations, relays, recovery zones, landing attempts, lessons, risk scales and weather rules. Every record carries its sources and compile date. A value that no source publishes is left empty with its reason and is never filled with a typical figure. The mission list itself holds 20 CLPS deliveries and 64 payloads, each payload with a source address.

4 Methods by mission section

Table 1 lists the six sections, the question each one answers and the reference against which its engine is checked. The subsections below describe the engines in the order of a delivery. Figure 2 shows two sections as the project manager sees them. Each number carries its margin, or a sentence stating why it has none.

4.1 Landing: the Sun and Earth above the local skyline


Terrain comes from the LOLA polar elevation models at 20 m (to 20 km from the site) and 80 m (to 50 km). Rays are cast on 1,440 bearings with the Moon's curvature removed, giving the elevation of the skyline in every direction. The Sun and Earth come from SPICE in the `MOON_ME` frame with light-time and stellar aberration corrections. A body is *up* when its centre clears the skyline at its azimuth. Each skyline crossing is located by bisection between time samples, so its time is not rounded to the step. Four durations follow over the chosen dates. The screens name them time in sunlight, time in contact with Earth, the longest night and the longest time without contact. Each duration carries a ± from the terrain's vertical error divided by the rate at which the body crosses the skyline. A crossing too shallow to time is reported as *grazing* instead of receiving a margin.

4.2 Launch: liftoff instants backed out from the landing


Landing rule. A landing time is allowed when the Sun's centre is above the site's skyline and rising, and the Earth is up. The project manager may narrow the Sun elevation to a band. Landing times that satisfy the rule are moved back by the time in lunar orbit and the flight time. The result is the set of days on which the vehicle must leave Earth.

Table 1: The six mission sections and the checks behind them.

Section	Question answered	Engine checked against
Ready	What is built, tested and delivered, and what is blocked?	State rules and the hash-chained audit log (tests)
Launch	When can the vehicle leave the pad for a landing the lighting allows?	Flown liftoffs of IM-1, IM-2 and Blue Ghost 1
Launch weather	Which published weather rule would be broken, in how many model runs?	One year of station observations at the Cape
Trip	Where is the spacecraft, when is it in shadow, what radiation does it meet?	NASA reconstructions of four CLPS trips and LRO; NOAA's event list
Landing	How long are the Sun and Earth above the site's skyline?	Blue Ghost 1's reported end; golden fixtures
Contact	When can a ground station hear the lander, and how long must a message wait?	DSN masks and SPICE station kernels (tests)
Return	Where does the booster or a capsule come down, in what sea?	OSIRIS-REx's measured landing point

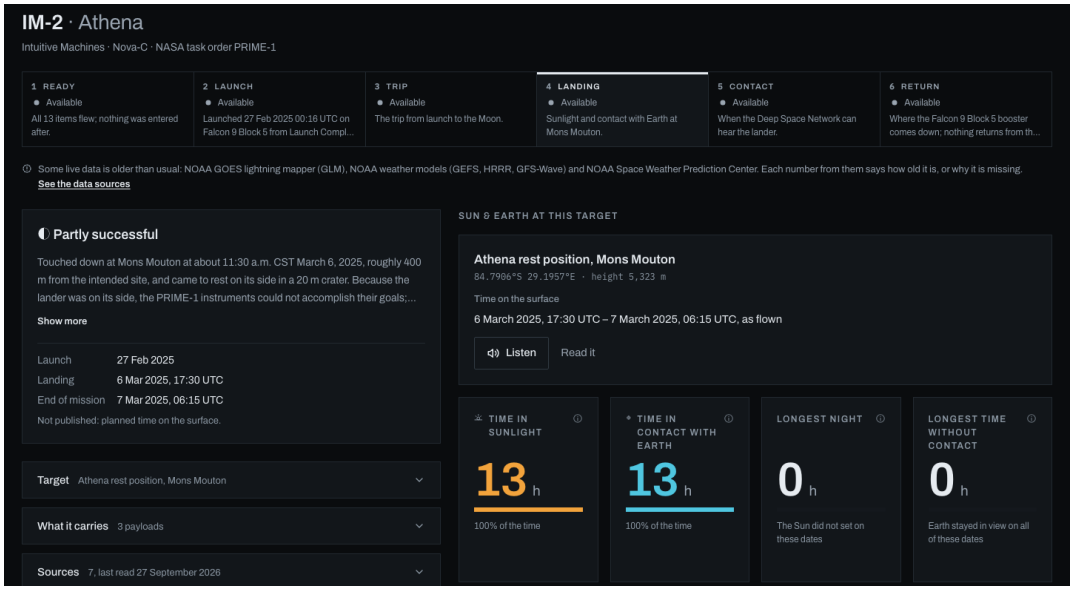

(a) IM-2: the six sections above the open Landing section and its four numbers.

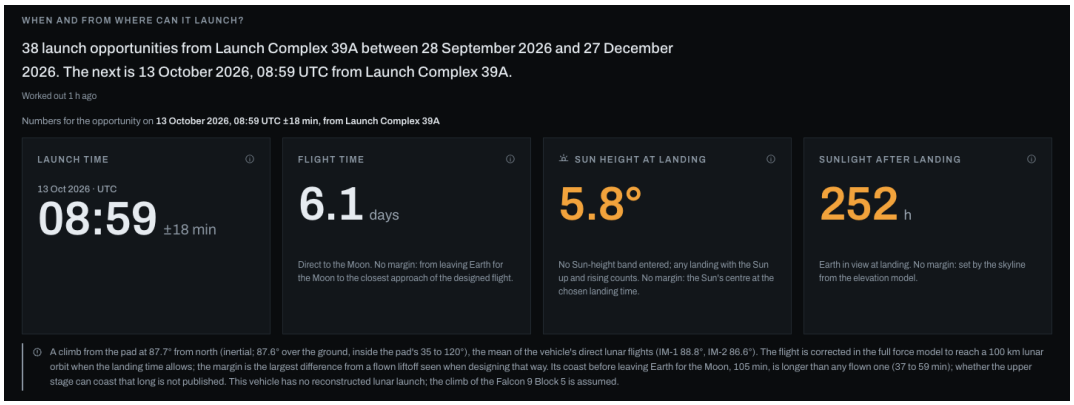

(b) Griffin-1's Launch section: the next liftoff carries the larger held-out miss, ±18 min.

Figure 2: Two screens at commit `f1d5667`, 1440 pixels wide, dark theme, cropped.

Liftoff instant. For a direct transfer the arrival at the Moon fixes the plane of the parking orbit. The pad must lie in that plane at liftoff. The climb direction then follows from $\sin A = \cos i / \cos \varphi$. Here A is the inertial azimuth, i the parking orbit's inclination and φ the pad's latitude. The angle a climb falls behind a circular orbit started at the pad, called here the *climb constant*, is measured on the vehicle's flown lunar launches. A design then corrects three quantities in the force model until the arrival matches. They are the liftoff time, the coast in the parking orbit before trans-lunar injection (TLI), and the speed that TLI adds. The force model holds the Sun, the Moon as a point mass and the Earth's zonal harmonics J2 to J6. A candidate climb azimuth outside the range's published or assumed limits is refused.

Phasing loops. Blue Ghost 1 flew several long Earth orbits before leaving for the Moon. For such a mission, the design raises the perigee at the first apogee. It then sets the period of the remaining loops and leaves Earth at the last perigee. It corrects liftoff, coast and the three burns in the force model for each launch day and keeps the cheapest loop count.

4.3 Trip: propagation, shadow and correction budget

A flown trip is read from NASA's reconstruction [2]. A designed trip is propagated in the J2000 frame on the barycentric dynamical time scale with an eighth-order Dormand–Prince integrator at a relative tolerance of 10^{-12}. The Sun and Moon are point masses from DE440 [10]. The Earth adds zonal terms J2 to J6. Within ten lunar radii the Moon's field is the GRAIL model GRGM1200A [14], to degree 50 in cruise and degree 100 in lunar orbit. Solar radiation pressure is off by default, because no lander publishes its area and mass at that point in the flight. Shadow stretches come from conical Earth and Moon shadows with the overlap of the two discs [13], and each edge is bisected.

The correction budget uses an assumed error model, since no provider publishes one. Errors at departure, in orbit knowledge and in each burn (the model of Gates [32]) are pushed through the trajectory in two ways. The linear method uses state transition matrices of each stretch. The Monte Carlo method flies seeded runs through the full force model, and each correction burn aims the run's own estimated state at the planned arrival. The answer reports the 95th and 99th percentiles of the total correction and labels them a budget for the assumed errors.

4.4 Trip: radiation screening

Belt fluence along the trajectory comes from AE8 and AP8 [21, 22] through IRBEM in SpacePy [23], with a factor of two on every value. The cosmic-ray dose is CRaTER's measured rate [25] scaled by the change of the model of Matthiä et al. [24] with solar modulation. The modulation parameter comes from the Oulu neutron monitor. On the surface, Chang'e-4's measured rate [26] is scaled the same way. It is also scaled by the fraction of open sky above the site, taken from the site's own skyline. Solar particle events during a flown trip are listed from NASA's DONKI record. Three past large events give comparison fluences: August 1972 from King's spectrum [27], and October 1989 and October 2003 integrated from GOES proton data. Every radiation answer states that it is screening only and names the tools in which a design must be confirmed.

4.5 Contact: when a station hears the lander

A ground station hears the lander when two conditions hold at once. Earth must be above the lander's skyline, which is the surface engine's existing number. The lander must also be above the station's own horizon mask, taken from the DSN handbook [29] per degree of azimuth. The station positions come from SPICE station kernels. The union over the 14 catalogued DSN antennas is the *time a ground station can hear the lander*. Contacts between nodes, each with its one-way light time, feed an earliest-arrival search over contacts, the simplest exact form of contact graph routing [30]. It yields the longest time a message created on the lander waits before

it reaches Earth. The plan can be exported in the contact-plan format of the Interplanetary Overlay Network or as CSV. Relays and link budgets are not computed, for reasons given in section 6.

4.6 Launch weather

The twelve weather rules of the Falcon 9 fact sheet [15] are stored verbatim as data, each with its unit, height and class. Two are *model* rules, checked against forecast numbers. Two are *proxy* rules, for which a model can only show the ingredients. Eight are *observation* rules, such as lightning within a set distance in the last 30 minutes, for which no forecast probability is given. A model rule is evaluated per run of the 31-member GEFS ensemble [16]. The wind at the rule's height of 162 ft is interpolated on a logarithmic profile between the model's 10 m and 80 m winds and is labelled as interpolated. The result is a share, k of 31 runs, with its exact interval. Beyond the ensemble's range, the answer falls back to month-by-hour climatology. Wind at 50 m comes from NASA POWER, which is based on MERRA-2 [19], and thunder hours come from GLM [18]. The range's official forecast is entered by the project manager with its document link and is never scraped.

4.7 Return: booster zone and capsule entry

The booster's landing type and zone come from the vehicle catalogue and Launch Library 2 landing records. For a planned droneship landing, the zone lies along the designed launch direction. The GFS-Wave forecast there is compared with limits that the team enters, since providers do not publish them. No CLPS mission returns a capsule. The capsule entry model is therefore checked on OSIRIS-REx [33]. It is a point mass with a ballistic coefficient, falling from the entry interface through the 1976 U.S. Standard Atmosphere [34] over a rotating Earth with J2 gravity. It has no lift and no parachutes.

4.8 Ready: readiness, parts, risks and the audit log

Readiness is a state machine per item. Its states are not started, in build, in test, test passed, delivered to the lander provider, integrated, verified on the lander and ready. An item may also be blocked, with a reason, from any state. Every change needs a date and an evidence link, and illegal moves are refused. Parts carry their status and a dependency path to the measurements they serve. Risks use a configurable likelihood and consequence scale and are never multiplied or summed. Every write needs a named session and is recorded in an append-only log in which each entry holds the hash of the previous one. A database trigger rejects updates and deletions of that log. The landing history lists 14 lunar landing attempts as counts with sourced causes, never as a success probability.

4.9 Agents

Four language-model agents describe a site, rank sites against a stated requirement, write the same facts for three audiences and answer questions. They reach the system only through ten read-only tools, four of which read the mission sections. A section is cut to at most 200 numbers before an agent sees it, and every kept value keeps its margin. A guard checks every number and full date in an answer against that run's tool results. It also rejects verdict words such as *go*, *no-go* or *safe*. After one failed repair, the answer is replaced by a summary built only from measured values.

5 Evaluation

5.1 Setup and choice of references

The engine checks and the load test ran with the backend at commit `f421298`. The response times, the test counts and the screens were measured at `f1d5667`. The commits between the two change only the feeds worker and the frontend, so no engine result differs. The machine was an Apple M3 with eight cores and 8 GB of memory. The software was macOS 27.0, Python 3.12.14, PostgreSQL 16.15 and Redis 8.10.2. Every table below is printed by a script or a `make` target listed in appendix A. The references were chosen because they are the only public cases of each kind. NASA's reconstructions cover the four flown CLPS trips, and the Lunar Reconnaissance Orbiter (LRO) adds a well-tracked lunar orbit. OSIRIS-REx is the only recent capsule with both a published entry state and a measured landing point [35, 36]. The plan also named GMAT for the propagator and SPENVIS for the belts. GMAT is not installed on the measurement machine, and SPENVIS is a web service that needs an account. Closed-form tests and NASA's own AE8/AP8 code replace them, and neither replacement is equivalent.

5.2 Landing: the Sun and Earth at the flown landers

Each flown lander's published LROC landing point was used as it stands, with its published surface dates. Nothing was tuned to these events. Blue Ghost 1 landed at 18.56° N, outside the polar terrain model, so its skyline is a smooth sphere. Its computed sunset falls on 16 March 2025 at 20:10 UTC, the date on which NASA reports that the mission ended. A golden test pins this sunset. IM-1 and IM-2 both ended while the Sun and Earth were still up at their sites. IM-1's next computed sunset is 2 March 2024 at 14:01 UTC ±28 min, with 83 % of the surrounding terrain inside the elevation model. IM-2's is 19 March 2025 at 19:17 UTC ±34 min. No cause is claimed for either end. The comparison shows that lighting geometry alone does not predict when a mission ends, and the product does not claim that it does.

At the pole the answer depends on metres of terrain. Table 2 gives the four numbers at three contrasting candidate sites over a reference window of 708.75 h from 14 March 2027. At Connecting Ridge the Sun's centre stays between −1.61° and −0.70° all month, yet the site is lit in 81 % of the samples (fig. 3). The site stands 1,957.5 m above the reference sphere, and its skyline has a mean elevation of −2.37° and a highest point of −0.06°.

Table 2: The four numbers at three candidate sites, in hours, 14 March 2027 plus 708.75 h.

Site	Sunlight	Contact with Earth	Longest night	Longest without contact
Connecting Ridge	574.4 ± 17.1	430.3 ± 5.3	121.6 ± 17.1	278.5 ± 5.3
Malapert massif	394.2 ± 7.3	570.6 ± 7.6	≥ 287.8	138.1 ± 7.6
Faustini rim	103.1 ± 24.0	278.6 ± 33.9	605.7, grazing	430.2, grazing

≥: a lower bound cut short by the window. Grazing: the crossing is too shallow to time, so no margin is given.

5.3 Propagator and shadows against NASA's reconstructions

The acceleration implied by each reconstruction was compared every 10 minutes with the force model's. Where they differ by more than 1×10^{-5} m/s^2, the spacecraft was firing thrusters. A *quiet stretch* is a run below that threshold, less 30 minutes at each end. From the start of a quiet stretch, the reconstructed state was propagated and compared with the reconstruction 24 or 72 hours later. Nothing was fitted. Table 3 gives the result.

The plan's tolerances were 1 km after 24 h and 5 km after 72 h. Every row meets them except IM-2's cruise, at 4.61 km. IM-2's reconstruction carries an acceleration that the force model lacks, with a median of 6.4×10^{-7} m/s^2 and a 90th percentile of 1.7×10^{-6} m/s^2 over the file. Held for one day, 1×10^{-6} m/s^2 moves a spacecraft by $\frac{1}{2}at^2 = 3.7$ km, which matches the size of the miss. Its cause is not published, and this report asserts none. Raising the Moon's field from degree 100 to 200 changes the lunar-orbit rows by at most 8 m. A 24-hour forward and

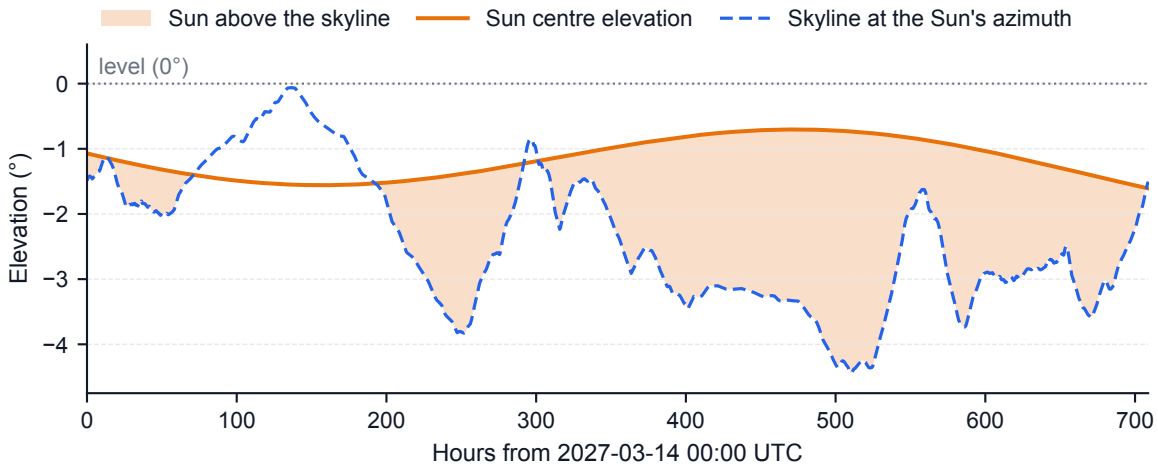


Figure 3: Sun and skyline at Connecting Ridge, 2,836 samples at 900 s. The Sun never rises above level but clears the lowered skyline in 81 % of samples.

Table 3: Position error after propagating a reconstructed state through a quiet stretch.

Reference	Start (UTC)	Where	After	Error (km)	With assumed SRP (km)
Blue Ghost 1	2025-01-15 07:32	cruise	24 h	0.37	0.51
Blue Ghost 1	2025-01-16 07:32	cruise	24 h	0.11	0.07
Blue Ghost 1	2025-01-17 07:32	cruise	24 h	0.11	0.07
Blue Ghost 1	2025-01-15 07:32	cruise	72 h	1.46	3.21
Blue Ghost 1	2025-02-03 13:12	cruise	72 h	1.08	0.62
IM-1	2024-02-19 20:26	cruise	8.5 h	0.64	0.64
IM-2	2025-02-27 01:51	cruise	24 h	**4.61**	4.43
IM-2	2025-03-03 13:01	lunar orbit	24 h	0.51	0.50
IM-2	2025-03-04 13:01	lunar orbit	24 h	0.27	0.28
LRO	2025-03-20 00:01	lunar orbit	24 h	0.05	0.05
LRO	2025-03-21 01:41	lunar orbit	24 h	0.03	0.03

SRP: solar radiation pressure with an assumed $C_r A/m$ of 0.01 m^2/kg. IM-1's longest quiet stretch is 8.5 h.

backward run returns to within 5.8 mm of its start.

Peregrine's reconstruction has no quiet stretch at all. Its unexplained acceleration has a median of 7.6×10^{-5} m/s^2 and a 90th percentile of 1.8×10^{-4} m/s^2. The provider traced the loss of that mission to a helium pressure control valve that failed to seal [37]. The residual shows where that leak appears in the trajectory; the engine does not estimate the leak.

Shadow edges were compared with SPICE's own occultation finder along two days of IM-2's lunar orbit, with the same spheres on both sides. Both found the same 24 shadow passes. The 48 edges differ by a median of 0.07 s and at most 0.10 s, inside the plan's 1 s.

5.4 Launch instants against the flown liftoffs

Each Falcon 9 lunar launch was designed from its pad, NASA's arrival at the Moon and the climb constant of the vehicle's other flights. Table 4 compares the designed liftoff with the published one under three choices of climb direction.

Table 4: Designed minus published liftoff, by the climb direction the design assumes.

Mission	Flown climb azimuth	Due east	Azimuth it flew	Other flight's azimuth
IM-1	88.8°	9.8 min	0.2 min	−15.8 min
IM-2	86.6°	27.4 min	−0.0 min	17.5 min
Blue Ghost 1	110.2°	phasing loops (**??**)		

Designed at the azimuth each flight actually climbed, the liftoff lands within 0.2 min of the published one. The designed coast, TLI speed and flight time agree with the flown values within 1.4 min, 1 m/s and 0.02 d. That result uses the flight's own direction, which is not known before launch. Held out, each Nova-C lander designed at the other flight's azimuth misses by 15.8 min and 17.5 min. The plan asked for 10 min, so this criterion is **not met**. The two flown azimuths differ by 2.2°, and each degree moves the instant by about seven minutes. Nothing published predicts which azimuth a flight will take. The planned calendar therefore climbs at the mean azimuth of the vehicle's direct flights and states the larger held-out miss as its margin. For Griffin-1 the designed climb is 87.7°, and every liftoff carries ±18 min.

5.5 Phasing loops and the correction budget

Burns were read from Blue Ghost 1's reconstruction by propagating each half hour and comparing its end with the reconstruction. Three burns before departure were found: 22.53, 3.27 and 23.61 m/s, a total of 49.4 m/s. Replayed from the first reconstructed state with these burns, the six flown apogees and perigees fall within 2.9 min and 0.027 % in radius of the reconstruction. The plan asked for 1 h and 1 %.

The loop design was then run for eleven launch days around the flown one (fig. 4). The flown day needs three loops, as flown, and costs 50.3 m/s. It is the cheapest of the eleven days by 45 m/s. On that day the Sun's pull over each eight-day loop does most of the perigee raising, which a two-body design cannot capture. Designed at the azimuth Blue Ghost 1 actually climbed, 110.2°, the flown day's liftoff lands 0.6 min after the published one, inside the plan's 5 min.

Table 5 gives the correction budget for the three landers under the assumed errors. The linear and Monte Carlo percentiles agree within 7 %; the plan allowed 10 %. Blue Ghost 1's one flown correction, 1.15 m/s, lies well inside its budget. IM-2's seven corrections add up to 24 m/s, between the 95th and 99th percentiles of its runs. IM-1's reconstruction shows no correction, because its burns fall in the gaps between its short stretches.

5.6 Radiation screening

SPENVIS was not run. The engine's belt fluences were therefore compared with a second implementation of the same models, NASA SPDF's own AE8/AP8 code. Each code uses its

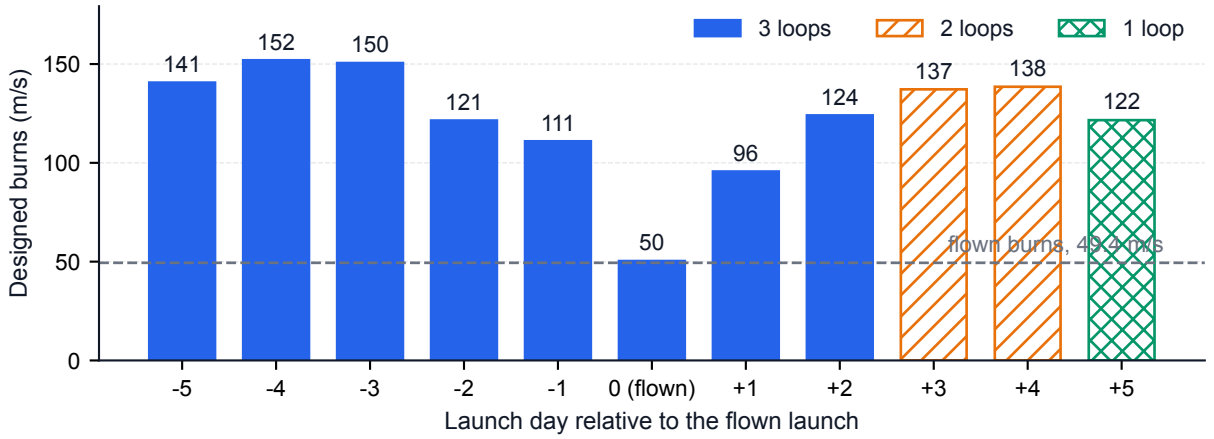


Figure 4: Designed burn total per launch day for Blue Ghost 1 (design climbing due east). The flown day is the cheapest; the dashed line is the total of the three flown burns.

Table 5: Total correction for assumed errors, linear method and 1,000 seeded runs.

Mission	95th, linear / runs	99th, linear / runs	99th, 95 % interval	Arrival altitude, 1–99 %
Blue Ghost 1	14.71 / 14.16	19.33 / 18.08	16.52–19.85	156.2 to 160.2 km
IM-1	20.91 / 21.64	27.45 / 28.50	25.93–30.40	110.6 to 114.5 km
IM-2	21.29 / 21.45	27.82 / 28.89	26.24–30.24	99.8 to 103.8 km

Velocities in m/s. The interval is a bootstrap interval on the 99th percentile of the runs.

own magnetic field shells. The comparison used one-minute samples within 15 Earth radii along each flown trajectory, with solar-maximum maps (table 6). Electrons agree within 5 % on every trip. Protons agree within 5 % on the two trips that spend hours in the inner belt. IM-2's proton fluence, about a thousand times smaller, differs by 40.5 %. It comes from minutes at the inner belt's lower edge, where the flux changes steeply and the two codes' shells differ most. IM-1's reconstruction starts 242,208 km from Earth, beyond the belts, so its belt numbers are missing with that reason rather than shown as zero.

Table 6: Belt fluence along flown trips: the engine (IRBEM) against NASA SPDF's AE8/AP8.

		Electrons >1 MeV (1/cm^2)			Protons >10 MeV (1/cm^2)		
Mission	Samples	IRBEM	SPDF	Diff.	IRBEM	SPDF	Diff.
IM-2	437	1.09×10^{10}	1.13×10^{10}	−2.8 %	8.55×10^{5}	1.44×10^{6}	−40.5 %
Blue Ghost 1	3,311	2.04×10^{10}	2.15×10^{10}	−5.0 %	8.00×10^{8}	7.94×10^{8}	0.7 %
Peregrine	867	2.35×10^{10}	2.33×10^{10}	0.8 %	2.67×10^{8}	2.80×10^{8}	−4.8 %

The cosmic-ray model was checked in absolute terms for June 2009. Its dose in a thin silicon layer in free space is 14.1 cGy per year. Two of CRaTER's detectors gave 18.9 and 16.5 cGy per year, so the model is lower by 26 % and 15 % [25]. Both lie inside the stated ±30 %. Scaled to each trip, the unshielded cosmic-ray dose is (0.21 ± 0.06) mGy per day for IM-1 and (0.17 ± 0.05) mGy per day for Blue Ghost 1. The GOES peaks of the October 1989 and October 2003 events match NOAA's list within 5.5 % and 0.0 %, inside the plan's 10 %.

5.7 Capsule entry against OSIRIS-REx

The OSIRIS-REx capsule's reconstructed trajectory in NAIF's archive ends at the entry interface, 6,503.142 km from the Earth's centre, at 14:41:55 UTC on 24 September 2023. Its state there matches the navigation team's published entry state to the last printed digit: flight path angle −8.184°, heading 66.396° and Earth-relative speed 12.361 km/s [35]. The ballistic coefficient β was built from published values. They are the capsule's mass at entry and the diameter of the

Stardust forebody it shares. The third is Stardust's hypersonic axial force coefficient C_A of 1.48 to 1.56 [38]. Table 7 compares the modelled landing with the point the recovery team measured [36].

Table 7: Modelled OSIRIS-REx landing against the measured point (limit 10 km).

C_A	β (kg/m^2)	Landing	Miss (km)	To ground (s)	Peak (g)
1.48	64.8	40.360, 9° N, 113.317, 6° W	6.7	524	30.8
1.52	63.1	40.353, 2° N, 113.349, 1° W	**9.5**	530	31.0
1.56	61.5	40.345, 6° N, 113.379, 7° W	12.2	535	31.2

Peak: the largest deceleration on the way down.

The middle coefficient passes the plan's 10 km with little room, and the published range of C_A spans 6.7 to 12.2 km. Every case lands short of the measured point. The mission team's own simulation from the same state, with its pre-flight atmosphere and winds, missed by 8.9 km [36]. A miss of this size is therefore expected from any model that does not know the day's upper atmosphere. The modelled time to the ground, 530 s, is not comparable with the observed 615 s, because the model has no parachutes. A seeded Monte Carlo of 200 runs gives a 99 % ellipse of 51.4 km by 21.4 km that holds the measured point.

5.8 Launch weather against station observations

No public station measures the wind at the rule's 162 ft, so the check was made at 10 m at the Cape Canaveral Skid Strip (station KXMR). The limit of 30 mph at 49 m becomes 23.5 mph at 10 m on a neutral logarithmic profile with a roughness length of 0.03 m. One GEFS run per day in 2025, with 31 members, gave the share of members above the limit 24 and 48 hours ahead. The outcome was the station's sustained wind in the report nearest that time. The reference forecast was the station's own month-by-hour frequency over 2015 to 2024. The Brier skill score compares the two: a positive value means the ensemble beats the climatology.

Table 8: GEFS wind shares against KXMR observations, 2025.

Lead	Cases	Events	Brier, GEFS	Brier, climatology	Brier skill
24 h	343	1	0.0040	0.0029	−0.41
48 h	339	0	0.0014	0.00003	−41.6

The plan's gate was a Brier skill of at least 0.1 at every lead up to 48 hours. The ensemble fails it at both leads (table 8), so every wind share on screen says *not checked against observations*. The event is rare. In 2025 the station reported more than 23.5 mph in 12 of 8,247 routine reports (0.15 %), against 0.36 % over 2015 to 2024. Only one such report fell at a verified time. The ensemble gave shares above zero on days without an event, once 94 %, which a near-zero climatology does not pay for. Only the lowest reliability bin holds 30 cases or more (669 cases, mean share 0.002, observed frequency 0). One year cannot verify a limit that is reached this rarely.

5.9 Response times and the compute queue

Table 9 gives response times through the API at commit `f1d5667`, with the compute and feeds workers stopped. The run followed three readings of the one-minute load average below 2, taken 20 s apart. A *cold* surface request asks for a window that no earlier request has asked for. It counts only if the response reports a cache miss, and all 30 of each kind did. A *warm* request repeats a window or reads a stored section answer. Each section was read 20 times for each of four missions: IM-1, IM-2, Blue Ghost 1 and Griffin-1.

A stored answer of any section returns within 10.4 ms at the 95th percentile. Of the 11.2 ms of a cold four-numbers request, the positions of the Sun and Earth take 6.7 ms and the two

Table 9: Response times through the API, median and 95th percentile.

Request	*N*	Median	p95
Landing: the surface engine			
Horizon mask, 1,440 bearings (precompute)	75	45.9 ms	50.6 ms
Four numbers, cold / warm	30 / 30	11.2 / 0.83 ms	14.4 / 0.92 ms
Timeline, 210 kB, cold / warm	30 / 30	16.6 / 4.05 ms	19.3 / 4.38 ms
Stored section answers, warm			
Six-section summary	80	1.3 ms	1.4 ms
Ready	80	1.5 ms	1.9 ms
Launch	80	3.0 ms	8.1 ms
Launch weather	80	5.4 ms	10.4 ms
Trip	80	9.3 ms	9.9 ms
Contact	80	2.0 ms	2.3 ms
Return	80	2.4 ms	4.4 ms

tracks against the skyline 2.6 ms. Most of a cold request is therefore spent on the ephemeris, not on the terrain.

A trip, launch calendar or contact answer that is not yet stored is computed as a job (section 3). The load test asks for these three sections of all 20 missions in one burst, with extra launch and contact windows: 138 requests in all. It runs against its own copy of the database, with two compute workers on the eight-core machine and the backend at `f421298`. The API answered 43 requests from stored answers and queued 58 jobs. It refused 37 contact requests with status 409 and a reason. The 13 missions concerned have no landing to hear. Their landing spot is not published, the lander was lost before reaching the Moon, or the delivery was cancelled. With all 138 requests in flight at once, the API's median response was 761 ms and its slowest 1.42 s. The two workers emptied the queue in 211.5 s, 16.5 jobs per minute, and were busy for 89 % of that time. No job failed or was retried. At the median a contact job ran for 0.19 s, a launch calendar for 13.3 s and a trip for 55.0 s. The longest wait in the queue was a trip's, 160.7 s. The same burst repeated afterwards found every answer stored and received 101 answers and the same 37 refusals, at a median of 318 ms per request.

5.10 Tests and accessibility

On the backend at `f1d5667`, the linter, strict static type checking of 246 source files and all ten import contracts pass. The full suite of 675 tests passes against its own database in 364 s. Of these, 475 need no service and run in 9.7 s, inside the plan's 20 s. Another 179 need PostgreSQL. The 38 golden tests among them pin results to committed fixtures or to the flown missions.

On the frontend at the same commit, the type check passes, and 236 unit and component tests pass. All 47 browser tests pass in Chromium in 4.0 min against the running API. Nineteen of them run on recorded contract fixtures, which pin the answers the API documents, and seven read the live API. Four browser tests run the axe accessibility checker against levels A and AA of the Web Content Accessibility Guidelines (WCAG) 2.1. A test fails on any violation that axe rates serious or critical. The four cover 26 routes in the dark and the light theme, 14 pages with every closed row open and the Settings sheet. On a 375-pixel phone they cover 14 routes and six pages with every row open. None reported a violation.

6 Limitations

Acceptance tolerances not met. Table 10 lists every planned tolerance with its measured value. Four results fall outside the plan. A held-out launch design misses by 15.8 min and 17.5 min against a planned 10 min, because the climb direction of a future flight is not published. IM-2's cruise propagation misses by 4.61 km against 1 km, because its reconstruction contains

an acceleration of unpublished origin. The weather ensemble has negative Brier skill at both leads, so no wind share is marked as checked. IM-2's belt protons differ by 40.5 % between two implementations of AP8, against a planned 5 %. The capsule check passes at the middle drag coefficient, but the published drag range moves the miss from 6.7 to 12.2 km, partly outside the limit.

Table 10: Planned acceptance tolerances and the measured values.

Check	Plan	Measured	Met
Propagation of reconstructions, 24 h	1 km	0.11–0.51 km; IM-2 cruise 4.61 km	partly
Propagation of reconstructions, 72 h	5 km	1.08, 1.46 km	yes
LRO in lunar orbit, 24 h	1 km	0.03, 0.05 km	yes
Forward and backward run, 24 h	1 m	5.8 mm	yes
Shadow edges against SPICE	1 s	0.10 s	yes
Liftoff from the flown TLI	2 or 5 min	4 to 15 s	yes
Liftoff designed at the flown azimuth	2 or 5 min	0.0 to 0.6 min	yes
Liftoff designed at the other flight's azimuth	10 min	15.8, 17.5 min	no
Loop replay: apsis time, radius	1 h, 1 %	2.9 min, 0.027 %	yes
Loop design: flown loop count and date	both	3 loops; period holds the date	yes
Correction budget, linear against runs	10 %	7 %	yes
Belt fluence, two AE8/AP8 codes	5 %	electrons 5.0 %; IM-2 protons 40.5 %	partly
Cosmic-ray dose against CRaTER	30 %	−26 %, −15 %	yes
Solar event peaks against NOAA	10 %	5.5 %, 0.0 %	yes
Wind shares, Brier skill	≥ 0.1	−0.41, −41.6	no
Capsule landing	10 km	9.5 km (6.7–12.2 km)	partly
GMAT and SPENVIS comparisons	run	not run	no

Parts of the plan not built. Planned relay satellites have no published orbit phase, so time in contact through a relay is not computed. The answer says so and gives the direct figure. No lander publishes its transmitter power or data rate, so no link budget is computed, and contact means line of sight only. Line of sight between a rover and its lander is not computed. No CLPS mission returns anything to Earth, and no planned one publishes an entry state. The Moon-to-Earth return trajectory and the weather at a capsule's landing zone are therefore not built. The European ensembles are not recorded, since only whole-globe fields are offered. NASA's GEOS-FP forecasts and the NAVAREA IV hazard warnings could not be reached from the measurement network.

Validity of the references. GMAT and SPENVIS, the plan's references, were not run. Closed-form tests replace GMAT: two-body motion against Kepler's equation, the J2 nodal drift against its analytic rate, and forward-and-backward runs. NASA's AE8/AP8 code replaces SPENVIS, but it implements the same models, so agreement shows correct use of the models, not their accuracy. The four CLPS reconstructions are orbit determination products, not truth, and IM-2's contains an unexplained acceleration.

Carried over from the surface engine. The terrain's vertical error is one value per product, 2 m or 4 m, not a per-pixel error, and crossing errors are treated as independent. The near-field noise threshold is not part of any margin. Terrain is modelled only south of 80° S; elsewhere the skyline is a smooth sphere and the durations are upper bounds. No model key was configured on the measurement machine, so the agents were not evaluated with a live language model. Their tests use scripted model replies. No user with a screen reader has tested the screens.

7 Conclusion

POLAR WINDOW now follows a CLPS delivery through six sections, from readiness on the ground to the return of the booster. Every number it serves states where it came from and how uncertain it is, or why no margin can be given. It also states the age of its live inputs. No section returns a verdict or a combined score. The engines were checked against the public record of the flown missions. The references were NASA's reconstructions of four CLPS trips, the flown liftoffs and NOAA's solar event list. CRaTER's measured dose and the landing point of the OSIRIS-REx capsule completed the set. Most checks meet the plan's tolerances. Four do not, and each is stated beside its measured value. They are the held-out launch design, IM-2's cruise, the weather ensemble's skill and the belt protons on IM-2's short passage. The planned relays, link budgets, rover line of sight and the Moon-to-Earth return remain unbuilt because their inputs are not public. The product is a screening and comparison tool. Its designed values are labelled as such and are meant to be confirmed in specialist tools before a mission team commits to them.

References

[1] NASA Science Mission Directorate. CLPS deliveries. NASA Science. URL `https://science.nasa.gov/lunar-science/clps-deliveries/`. Accessed 2026-09-27.

[2] NASA Navigation and Ancillary Information Facility. CLPS SPICE archive (PDS4). Planetary Data System. URL `https://naif.jpl.nasa.gov/pub/naif/pds/pds4/clps/clps_spice/`. Reconstructed trajectories of Peregrine, IM-1, Blue Ghost Mission 1 and IM-2; accessed 2026-09-26.

[3] NASA Space Apps Challenge. CLPS lunar mission browser. Challenge statement, 2026. URL `https://www.spaceappschallenge.org/2026/challenges/clps-lunar-mission-browser/`.

[4] David E. Smith, Maria T. Zuber, Glenn B. Jackson, John F. Cavanaugh, Gregory A. Neumann, Haris Riris, Xiaoli Sun, Ronald S. Zellar, Craig Coltharp, Joseph Connelly, Richard B. Katz, Igor Kleyner, Peter Liiva, Adam Matuszeski, Erwan M. Mazarico, Jan F. McGarry, Anne-Marie Novo-Gradac, Melanie N. Ott, Carlton Peters, Luis A. Ramos-Izquierdo, Lawrence Ramsey, David D. Rowlands, Stephen Schmidt, V. Stanley Scott, George B. Shaw, James C. Smith, Joseph-Paul Swinski, Mark H. Torrence, Glenn Unger, Anthony W. Yu, and Thomas W. Zagwodzki. The lunar orbiter laser altimeter investigation on the lunar reconnaissance orbiter mission. *Space Science Reviews*, 150(1–4):209–241, 2010. doi: 10.1007/s11214-009-9512-y.

[5] E. Mazarico, G.A. Neumann, D.E. Smith, M.T. Zuber, and M.H. Torrence. Illumination conditions of the lunar polar regions using lola topography. *Icarus*, 211(2):1066–1081, 2011. doi: 10.1016/j.icarus.2010.10.030.

[6] Emerson J. Speyerer and Mark S. Robinson. Persistently illuminated regions at the lunar poles: Ideal sites for future exploration. *Icarus*, 222(1):122–136, 2013. doi: 10.1016/j.icarus.2012.10.010.

[7] P. Gläser, F. Scholten, D. De Rosa, R. Marco Figuera, J. Oberst, E. Mazarico, G.A. Neumann, and M.S. Robinson. Illumination conditions at the lunar south pole using high resolution digital terrain models from lola. *Icarus*, 243:78–90, 2014. doi: 10.1016/j.icarus.2014.08.013.

[8] Charles H. Acton. Ancillary data services of nasa's navigation and ancillary information facility. *Planetary and Space Science*, 44(1):65–70, 1996. doi: 10.1016/0032-0633(95)00107-7.

[9] Charles Acton, Nathaniel Bachman, Boris Semenov, and Edward Wright. A look towards the future in the handling of space science mission geometry. *Planetary and Space Science*, 150:9–12, 2018. doi: 10.1016/j.pss.2017.02.013.

[10] Ryan S. Park, William M. Folkner, James G. Williams, and Dale H. Boggs. The jpl planetary and lunar ephemerides de440 and de441. *The Astronomical Journal*, 161(3):105, 2021. doi: 10.3847/1538-3881/abd414.

[11] Steven P. Hughes, Rizwan H. Qureshi, Steven D. Cooley, and Joel J. Parker. Verification and validation of the general mission analysis tool (gmat). In *AIAA/AAS Astrodynamics Specialist Conference*. American Institute of Aeronautics and Astronautics, 2014. doi: 10.2514/6.2014-4151.

[12] Dario Izzo. Revisiting lambert's problem. *Celestial Mechanics and Dynamical Astronomy*, 121(1):1–15, 2015. doi: 10.1007/s10569-014-9587-y.

[13] Oliver Montenbruck and Eberhard Gill. *Satellite Orbits*. Springer Berlin Heidelberg, Berlin, Heidelberg, 2000. doi: 10.1007/978-3-642-58351-3.

[14] Maria T. Zuber, David E. Smith, David H. Lehman, Tom L. Hoffman, Sami W. Asmar, and Michael M. Watkins. Gravity recovery and interior laboratory (grail): Mapping the lunar interior from crust to core. *Space Science Reviews*, 178(1):3–24, 2013. doi: 10.1007/s11214-012-9952-7.

[15] NASA Kennedy Space Center. Falcon 9 crew dragon launch weather criteria. Technical Report FS-2020-05-568-KSC, National Aeronautics and Space Administration, 2020. URL `https://www.nasa.gov/wp-content/uploads/2021/07/falcon9_crewdragon_launch_weather_criteria_fact_sheet.pdf`.

[16] Hong Guan, Yuejian Zhu, Eric Sinsky, Bing Fu, Wei Li, Xiaqiong Zhou, Xianwu Xue, Dingchen Hou, Jiayi Peng, M. M. Nageswararao, Vijay Tallapragada, Thomas M. Hamill, Jeffrey S. Whitaker, Gary Bates, Philip Pegion, Sherrie Frederick, Matthew Rosencrans, and Arun Kumar. Gefsv12 reforecast dataset for supporting subseasonal and hydrometeorological applications. *Monthly Weather Review*, 150(3):647–665, 2022. doi: 10.1175/mwr-d-21-0245.1.

[17] Steven J. Goodman, Richard J. Blakeslee, William J. Koshak, Douglas Mach, Jeffrey Bailey, Dennis Buechler, Larry Carey, Chris Schultz, Monte Bateman, Eugene McCaul, and Geoffrey Stano. The goes-r geostationary lightning mapper (glm). *Atmospheric Research*, 125–126:34–49, 2013. doi: 10.1016/j.atmosres.2013.01.006.

[18] Katrina Virts, Steven J. Goodman, and Scott Rudlosky. Geostationary lightning mapper (GLM) combined hourly thunder hour. NASA Global Hydrometeorology Resource Center DAAC, 2025.

[19] Ronald Gelaro, Will McCarty, Max J. Suárez, Ricardo Todling, Andrea Molod, Lawrence Takacs, Cynthia A. Randles, Anton Darmenov, Michael G. Bosilovich, Rolf Reichle, Krzysztof Wargan, Lawrence Coy, Richard Cullather, Clara Draper, Santha Akella, Virginie Buchard, Austin Conaty, Arlindo M. da Silva, Wei Gu, Gi-Kong Kim, Randal Koster, Robert Lucchesi, Dagmar Merkova, Jon Eric Nielsen, Gary Partyka, Steven Pawson, William Putman, Michele Rienecker, Siegfried D. Schubert, Meta Sienkiewicz, and Bin Zhao. The modern-era retrospective analysis for research and applications, version 2 (merra-2). *Journal of Climate*, 30(14):5419–5454, 2017. doi: 10.1175/jcli-d-16-0758.1.

[20] GLENN W. Brier. Verification of forecasts expressed in terms of probability. *Monthly Weather Review*, 78(1):1–3, 1950. doi: 10.1175/1520-0493(1950)078<0001:vofeit>2.0.co;2.

[21] James I. Vette. The AE-8 trapped electron model environment. Technical Report NSSDC/WDC-A-R&S 91-24 (NASA-TM-107820), National Space Science Data Center, NASA Goddard Space Flight Center, Greenbelt, MD, 1991. URL https://ntrs.nasa.gov/citations/19920014985.

[22] Donald M. Sawyer and James I. Vette. AP-8 trapped proton environment for solar maximum and solar minimum. Technical Report NSSDC/WDC-A-R&S 76-06 (NASA-TM-X-72605), National Space Science Data Center, NASA Goddard Space Flight Center, Greenbelt, MD, 1976. URL https://ntrs.nasa.gov/citations/19770012039.

[23] Jonathan T. Niehof, Steven K. Morley, Daniel T. Welling, and Brian A. Larsen. The spacepy space science package at 12 years. *Frontiers in Astronomy and Space Sciences*, 9:1023612, 2022. doi: 10.3389/fspas.2022.1023612.

[24] Daniel Matthiä, Thomas Berger, Alankrita I. Mrigakshi, and Günther Reitz. A ready-to-use galactic cosmic ray model. *Advances in Space Research*, 51(3):329–338, 2013. doi: 10.1016/j.asr.2012.09.022.

[25] N. A. Schwadron, T. Baker, B. Blake, A. W. Case, J. F. Cooper, M. Golightly, A. Jordan, C. Joyce, J. Kasper, K. Kozarev, J. Mislinski, J. Mazur, A. Posner, O. Rother, S. Smith, H. E. Spence, L. W. Townsend, J. Wilson, and C. Zeitlin. Lunar radiation environment and space weathering from the cosmic ray telescope for the effects of radiation (crater). *Journal of Geophysical Research: Planets*, 117(E12):E00H13, 2012. doi: 10.1029/2011je003978.

[26] Shenyi Zhang, Robert F. Wimmer-Schweingruber, Jia Yu, Chi Wang, Qiang Fu, Yongliao Zou, Yueqiang Sun, Chunqin Wang, Donghui Hou, Stephan I. Böttcher, Sönke Burmeister, Lars Seimetz, Björn Schuster, Violetta Knierim, Guohong Shen, Bin Yuan, Henning Lohf, Jingnan Guo, Zigong Xu, Johan L. Freiherr von Forstner, Shrinivasrao R. Kulkarni, Haitao Xu, Changbin Xue, Jun Li, Zhe Zhang, He Zhang, Thomas Berger, Daniel Matthiä, Christine E. Hellweg, Xufeng Hou, Jinbin Cao, Zhen Chang, Binquan Zhang, Yuesong Chen, Hao Geng, and Zida Quan. First measurements of the radiation dose on the lunar surface. *Science Advances*, 6(39):eaaz1334, 2020. doi: 10.1126/sciadv.aaz1334.

[27] JOSEPH H. King. Solar proton fluences for 1977-1983 space missions. *Journal of Spacecraft and Rockets*, 11(6):401–408, 1974. doi: 10.2514/3.62088.

[28] Robert C. Singleterry, Steve R. Blattnig, Martha S. Clowdsley, Garry D. Qualls, Chris A. Sandridge, Lisa C. Simonsen, Tony C. Slaba, Steven A. Walker, Francis F. Badavi, Jan L. Spangler, Aric R. Aumann, E. Neal Zapp, Robert D. Rutledge, Kerry T. Lee, Ryan B. Norman, and John W. Norbury. Oltaris: On-line tool for the assessment of radiation in space. *Acta Astronautica*, 68(7–8):1086–1097, 2011. doi: 10.1016/j.actaastro.2010.09.022.

[29] Jet Propulsion Laboratory. DSN telecommunications link design handbook. Technical Report 810-005, Jet Propulsion Laboratory, California Institute of Technology, Pasadena, CA. URL https://deepspace.jpl.nasa.gov/dsndocs/810-005/. Module 301, antenna horizon masks; accessed 2026-09-27.

[30] Giuseppe Araniti, Nikolaos Bezirgiannidis, Edward Birrane, Igor Bisio, Scott Burleigh, Carlo Caini, Marius Feldmann, Mario Marchese, John Segui, and Kiyohisa Suzuki. Contact graph routing in dtn space networks: overview, enhancements and performance. *IEEE Communications Magazine*, 53(3):38–46, 2015. doi: 10.1109/mcom.2015.7060480.

[31] C. J. Clopper and E. S. Pearson. The use of confidence or fiducial limits illustrated in the case of the binomial. *Biometrika*, 26(4):404–413, 1934. doi: 10.1093/biomet/26.4.404.

[32] C. R. Gates. A simplified model of midcourse maneuver execution errors. Technical Report Technical Report 32-504 (NASA-CR-53032), Jet Propulsion Laboratory, California Institute of Technology, Pasadena, CA, 1963. URL https://ntrs.nasa.gov/citations/19640003365.

[33] D. S. Lauretta, S. S. Balram-Knutson, E. Beshore, W. V. Boynton, C. Drouet d'Aubigny, D. N. DellaGiustina, H. L. Enos, D. R. Golish, C. W. Hergenrother, E. S. Howell, C. A. Bennett, E. T. Morton, M. C. Nolan, B. Rizk, H. L. Roper, A. E. Bartels, B. J. Bos, J. P. Dworkin, D. E. Highsmith, D. A. Lorenz, L. F. Lim, R. Mink, M. C. Moreau, J. A. Nuth, D. C. Reuter, A. A. Simon, E. B. Bierhaus, B. H. Bryan, R. Ballouz, O. S. Barnouin, R. P. Binzel, W. F. Bottke, V. E. Hamilton, K. J. Walsh, S. R. Chesley, P. R. Christensen, B. E. Clark, H. C. Connolly, M. K. Crombie, M. G. Daly, J. P. Emery, T. J. McCoy, J. W. McMahon, D. J. Scheeres, S. Messenger, K. Nakamura-Messenger, K. Righter, and S. A. Sandford. Osiris-rex: Sample return from asteroid (101955) bennu. *Space Science Reviews*, 212(1–2):925–984, 2017. doi: 10.1007/s11214-017-0405-1.

[34] National Oceanic and Atmospheric Administration, National Aeronautics and Space Administration, and United States Air Force. U.S. standard atmosphere, 1976. Technical Report NOAA-S/T 76-1562 (NASA-TM-X-74335), U.S. Government Printing Office, Washington, DC, 1976. URL https://ntrs.nasa.gov/citations/19770009539.

[35] Daniel R. Wibben, Andrew Levine, Jason R. Russell, Anna T. Montgomery, James V. McAdams, Samantha Rieger, Peter G. Antreasian, and Kenneth M. Getzandanner. OSIRIS-REx earth return and entry: Targeting strategy and maneuver performance. In *46th Annual AAS Guidance, Navigation and Control Conference*, number AAS 24-058, Breckenridge, CO, 2024. URL https://ntrs.nasa.gov/citations/20240000803.

[36] Scott R. Francis, Mark A. Johnson, Eric Queen, and R. Anthony Williams. Entry, descent, and landing analysis for the OSIRIS-REx sample return capsule. In *46th Annual AAS Guidance, Navigation and Control Conference*, Breckenridge, CO, 2024. URL https://ntrs.nasa.gov/citations/20240000629.

[37] Astrobotic Technology. Peregrine mission one: Post-mission report. Technical report, Astrobotic Technology, Inc., Pittsburgh, PA, 2024. URL https://www.astrobotic.com/wp-content/uploads/2024/08/PM1_Post-Mission-Report_Website.pdf.

[38] R. Mitcheltree, R. Wilmoth, F. Cheatwood, G. Brauckmann, and A. Greene. Aerodynamics of stardust sample return capsule. In *15th Applied Aerodynamics Conference*. American Institute of Aeronautics and Astronautics, 1997. doi: 10.2514/6.1997-2304.

A Reproducing the numbers

Each table and figure comes from one command, run from the repository root with the services and data described in the runbook. Targets named `make` are in the repository. The scripts named "the report's" read the running API and are kept with the report's working files, outside the repository.

Table 11: Where each result comes from.

Result	Command
Tables 3 to 5	`make validate-trip`
Figure 4	`make validate-trip`, drawn by the report's `make_fig_loops.py`
Shadow edges against SPICE	`test_eclipse_vs_spice.py`, printed by the report's `eclipse_check.py`
Table 8	`make hindcast-weather` (cached GEFS runs and KXMR reports)
Table 6 and the cosmic-ray and event checks	`make validate-radiation`
Table 7 and the footprint	`make validate-capsule`
Table 2, fig. 3	the report's `export_data.py` and `make_figure.py`
Landing hindcast	`test_hindcast.py`; the report's `hindcast_surface.py`
Table 9	the report's `measure_timing.py` and `sections.py --timing`
The compute queue	`make load-compute`
Figure 2	`frontend/scripts/screens.ts` in a clean checkout, run by the report's `screens.sh` and cropped by `make_fig_screens.py`
Test counts	`make lint`, `make test`, `npx vitest run`, `npx playwright test`